


Automotive Bearing

Wheel hub bearing unit



We have developed Hub Unit Generation I II & III. The integrated hub bearing unit is now the dominant solution for car and light commercial wheel bearing applications. This family of products has developed into a broad ranging, highly sophisticated set of design solutions.

They are suitable for Various famous Cars, e. G. Fiat, Benz, Audi, Renault, BMW, Chrysler and also for Volkswagen, Ford, Opel, Toyota, Nissan, Honda, Volvo, GM and Hyundai.

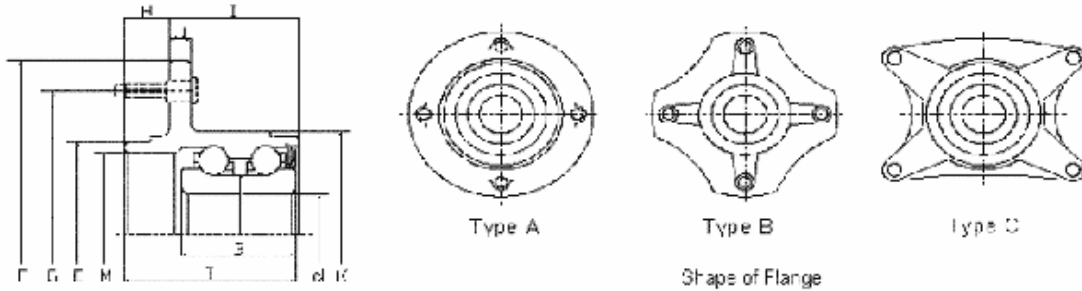

Item No.	Dimension(mm)											Outer ring flange				Remark
	d	F	B	T	E	M	G	K (Ref.)	H	I	J	Bolt size	Bolt hole diameter	Bolt quantity	Flange Shape	
DACF1029	25	133	43	73.4	60	54.3	100	71	19.4	54	12	-	M12X1.5	4	A	
DACF1035B	25	133	43	73.4	60	54.25	108	71	19.4	54	12.25	M12X1.5	14.22	5	A	
DACF1082C	27	148	55	73	66	52	114.3	64	15.5	57.5	9	-	12.5	4	A	
27BWK04D2	27	134	50	67.5	59	52	100	64	15	52.5	9	-	14	4	A	
DACF1050B	28	125	48	70.5	56	50	100	67.5	14	56.5	9	M12X1.5	14	4	A	
DACF1076B	28	-	42	-	-	61	97	66.2	-	51.8	7	-	10.5	4	C	
DACF1112A	28	139	38	64.5	67	58	114.3	70	14	50.5	9	-	14	4	A	
DACF1050A	28	140	48	70.5	67	59	114.3	63	14	50.5	9	M12X1.5	14	4	A	
28BWK15A	28	120	40	55.5	60	47	100	66	9	49.5	9	M12X1.25	12	4	A	
HUB144	28	134	40	67.5	60	51	114.3	66	18	49.5	9	M12X1.25	12	4	A	
DACF1083CR	30	117	37	61.3	58	52	98	71.8	17	44.3	10	-	M12X1.5	4	A	
DACF1041C	30	122	47	69.5	54	48	100	68.5	13.5	56	8	M12X1.5	12.56	4	A	
DACF1049A	30	126	59	77	56	50.5	100	65.5	14.5	62.5	10	M12X1.25	14	5	A	
DACF1038A	30	131	43	71.3	65	59	108	76	19	51	13.5	-	M12X1.5	4	A	

DACF110ZA	30	136	41	66.5	56	51	100	68.5	11.5	54.5	8	-	12.1	4	A	
DACF1015	30	136	40	66	56	51	100	68.5	11.5	54.5	8	M12X1.5	12.1	4	A	
DACF1086	30	140	50	72	67	59	114.3	68.9	15.5	56.5	9	M12X1.5	14	4	A	
DACF1087A	30	125.5	50	70.5	56	50	100	68.9	14	56.5	10	M12X1.5	14	4	A	
DACF1065A	30	152	41	67.5	64	58	114.3	67.4	11.5	55.35	9	M12X1.5	12.1	4	B	
DACF1072B-1	30	-	42	-	-	63	99	68.2	-	51.8	7.5	-	10.5	4	C	
DACF1022B	30	-	42	-	-	63	99	72	-	58.8	7.5	-	10.5	4	C	
DACF1091A	30	-	50	54	66	58.3	90	68	10	44	10	-	M10X1.25	4	C	
DACF1097D	30	-	42	-	-	63	99	73.6	-	51.8	7.5	-	10.5	4	C	
BAF4104E	30	120	37	63.5	57	63.5	100	69.5	19	44.5	10.5	-	M14X1.5	5	A	
DACF1005C	31	120	40	61	57	50.5	100	73.8	19	42	12	-	M12X1.5	4	A	
BAFB44450	32	128	34	58.2	65	60	108	80	16	42.2	12.5	-	M12X1.25	4	A	
DACF1034C	33	140	47	71.2	67	59	114.3	77	14	64.7	9	M12X1.5	14	5	A	
DACF1081C	34	139	42	64.5	67	58	114.3	74	14	50.5	9	M12X1.5	14	4	A	
DACF1036A	34	139.5	42	70	64	58	114.3	75	15	55	9	M12X1.5	12.1	4	A	
DACF1031D	34.5	139	52	65.5	63.26	58	108	86	17.89	47.61	10	M12X1.5	13.1	5	A	
DACF1023D	35	137	45	69.5	65	53.3	108	81	20.5	49	12	M12X1.5	13.1	5	A	
DACF1018L	35	137	45	74	65	57	110	81.6	25	49	12	-	M12X1.5	5	A	
246744AA/WB	35	137	45	69.5	68	-	-	-	20.5	-	12	M12X1.5	-	-	A	ABS Ring 48 teeth
246744AA/WA	35	137	45	69.5	68	-	-	-	20.5	-	12	M12X1.5	-	-	A	ABS Ring 96 teeth
246744A	35	137	45	69.5	68	-	-	-	20.5	-	12	M12X1.5	-	-	A	
DACF1063A	36	140	50	71	67	59	114.3	79	14.5	57	11	M12X1.5	14	5	A	
DACF1033K	37	139	45	64	72.5	66	120	79	19	45	11	-	M12X1.5	5	A	
DACF1033K1	37	139	45	64	72.5	66	120	80	19	45	11	-	M12X1.5	5	A	
446420CD	37	139	45	64	79	-	-	-	19	-	11	-	M12X1.5	5	A	ABS Ring 48 teeth
447318B	37	139	45	64	79	-	-	-	19	-	11	-	M12X1.5	5	A	ABS Ring 48 teeth (Pressed ring)
DACF1074C	38	146.5	52	77	70	64	114.3	74	15	62	9	M12X1.5	12.1	5	A	
DACF1092A	40	-	43	-	84	73	106	82	16.4	26.5	10	-	M12X1.25	4	C	
HUB081-44	43	-	44	44	82.8	-	102	86	16.5	27.5	15	-	M10X1.25	4	C	